


Kanlux

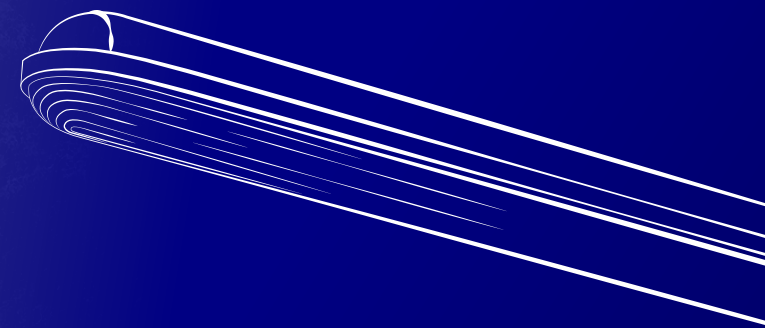

Hermetic Fixtures
Kanlux MAH LED HI

Kanlux

**HIGH DEGREE
TIGHTNESS**

**IP
65**

**HIGH
IMPACT
RESISTANCE**

08IK

Kanlux

Kanlux MAH LED HI

up to
150 lm/W
(version 26W)

luminous efficiency



durability **50 000h**



5 year warranty*



* under the terms of the warranty statement,
available on the website



Kanlux



Reliable
Solutions

Kanlux

Loop through facility

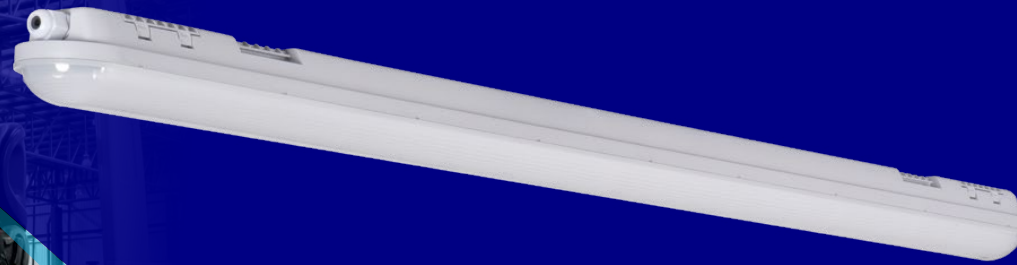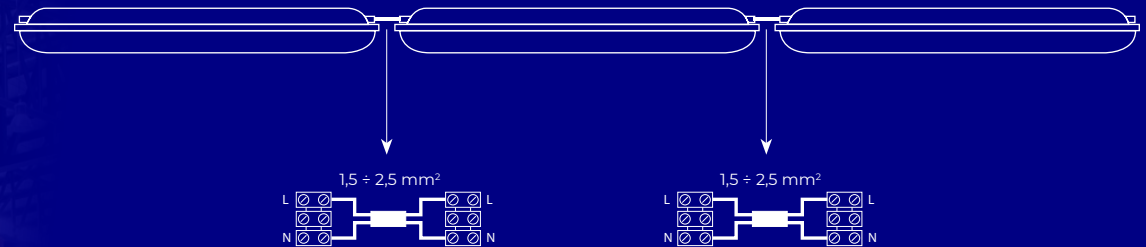


grommetson
both ends

max 40 - MAH LED HI **19W**-NW RYF

NEW max 18 - MAH LED HI **26W**-NW RYF

max 20 - MAH LED HI **38W**-NW RYF

max 16 - MAH LED HI **48W**-NW RYF

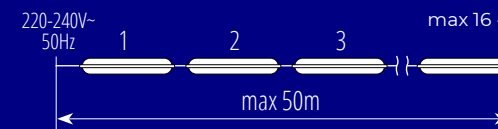

Kanlux

SUPER
HIGH
lumen


50000h
LONG
lifetime

5
WARRANTY
5 years

Four options to choose from:

22606


MAH LED HI **19W**-NW RYF



575mm - 19W - 2400lm

22609


MAH LED HI **26W**-NW RYF



1180mm - 26W - 3900lm

22607


MAH LED HI **38W**-NW RYF



1175mm - 38W - 5000lm

22608

MAH LED HI **48W**-NW RYF

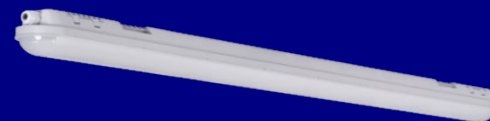

1475mm - 48W - 6400lm

NEW

Technical parameters:

IP65

mechanical resistance: **IK08**

luminous efficacy: ~ **130lm / W** and **150lm / W**

for the 26W version

color temperature: **4000K**

durability: **50 000h**


Kanlux



A wide range of applications:
industrial premises, warehouses, parking lots,
garages, basements, car workshops.

Kanlux

Kanlux MAH LED HI

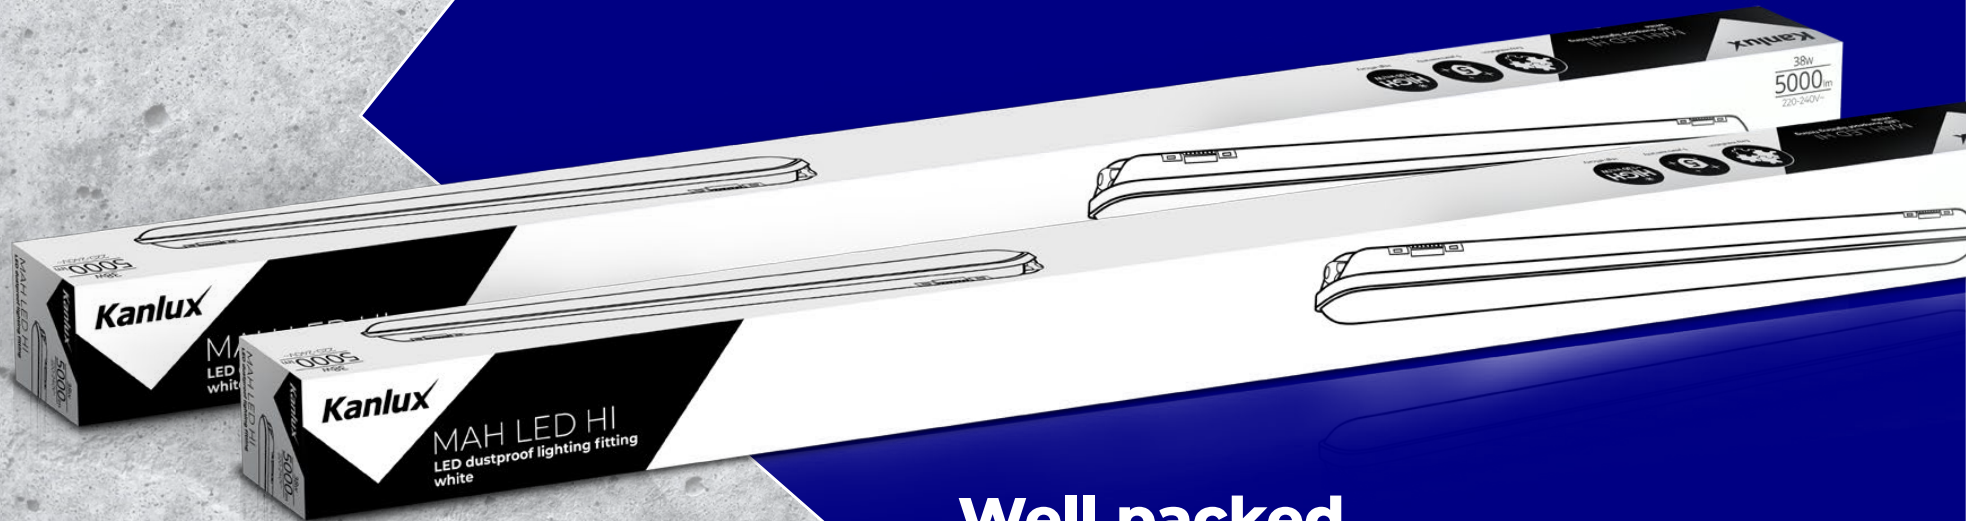

Well packed